


## ENCORE | Ceiling Lights

### ENCORE SL 6 / 10 / 15 / 22

- Extremely flat LED ceiling recessed downlight
- 32mm installation height
- 4 different sizes
- Mounting frame as an accessory
- Homogeneous light surface
- Opal wide diffuser disc
- Installation depth 32mm
- Integrated switchable converter
- External dimmable converter
- Tool-free installation
- Flicker-free light
- From size SL10 with mounting frame also as Suitable for wall / surface-mounted luminaires



Product number	System performance typ. [W]	Light color		Luminous flux [lm]	Control
		■	◆		
805599	6	3000K	◆	510	switchable
805615	6	4000K	◆	540	switchable
805616	6	3000K	◆	510	dimmable
805617	6	4000K	◆	540	dimmable
805600	10	3000K	◆	850	switchable
805618	10	4000K	◆	900	switchable
805619	10	3000K	◆	850	dimmable
805620	10	4000K	◆	900	dimmable
805601	15	3000K	◆	1270	switchable
805621	15	4000K	◆	1350	switchable
805622	15	3000K	◆	1270	dimmable
805623	15	4000K	◆	1350	dimmable
805592	22	3000K	◆	1870	switchable
805624	22	4000K	◆	1980	switchable
805625	22	3000K	◆	1870	dimmable
805626	22	4000K	◆	1980	dimmable

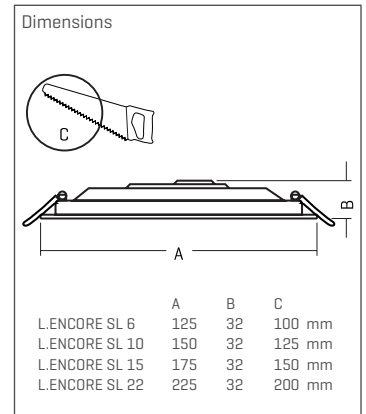

### Article Number | Explanation

Example: HL-■S-HT●-02◆▲C

- HL Series
- System performance typ. [W]
- ◆ Light color
- ▲ Beam characteristic
- Control
- ▷ CRI
- \* Dimensions [mm]
- \* Equipment

For example: HL

HL Series, D=dimmable, 80/100 Watt, 5000K, A2=120°, 60=60°, TA=60°x90°, 8=CRI>80

### TRS-STAR GmbH

Werner-von-Siemens-Str. 1  
76297 Stutensee

Planung und technischer Vertrieb  
Dipl. Ing. Frank Werz

T +49 6233 347-125  
[werz@trs-star.com](mailto:werz@trs-star.com)