


STEP | Stair Lights

STEP 2 RL / STEP 2 SL

- 1.5 W HP LED stair light
- AC85-265 V 50/60 Hz
- Beam angle: 90 °
- IP30
- Lumens: 70 ~ 80 IM / W.
- 80 x 80 x 30 mm,
installation dimensions: 65 x 65 mm
- Color temperature: 3000K
- Housing: white, black, gray
- Material: aluminum alloy

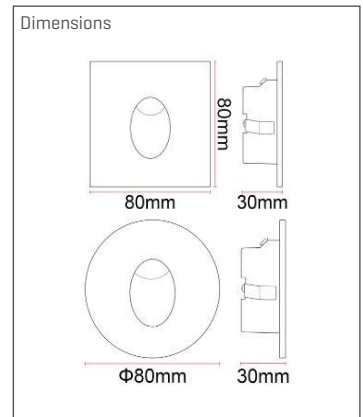

Product number	System performance typ. [W]	Light color	Beam characteristic	Luminous flux [lm]	CRI	Control
	■	◆	▲		▶	●
805530-round white	1,5 W HP IP30	3000K	90°	70 ~ 80 / W		
805574-round black	1,5 W HP IP30	3000K	90°	70 ~ 80 / W		
805531-square white	1,5 W HP IP30	3000K	90°	70 ~ 80 / W	Ra>80	-
805575-square black	1,5 W HP IP30	3000K	90°	70 ~ 80 / W		

Article Number | Explanation

Example: HL-■S-HT●-02◆▲C▶

- HL Series
- System performance typ. [W]
- ◆ Light color
- ▲ Beam characteristic
- Control
- ▶ CRI
- * Dimensions [mm]
- x Equipment

For example: HL

HL Series, D=dimmmable, 80/100 Watt, 5000K, A2=120°, 60=60°, TA=60°x90°, 8=CRI>80

TRS-STAR GmbH

Werner-von-Siemens-Str. 1
76297 Stutensee

Development, Planning
and Technical Sales
Dipl. Ing. Frank Werz
T +49 6233 347-125
werz@trs-star.com