
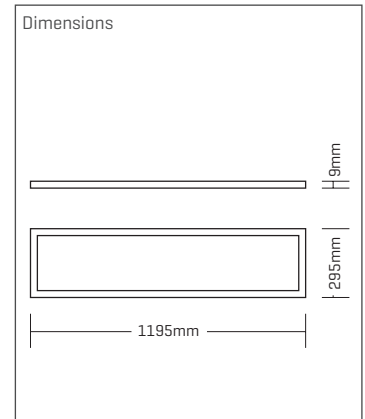


ENCORE | Ceiling Lights

ENCORE SL 120

- LED ceiling light
- Ultra-flat 9mm light panel
- Recessed, surface-mounted, pendant version and wall lamp
- Opal uniformly wide diffuser disc
- Patented edge feed
- Flicker-free light
- Including external converter

- Modifications:
 - dimming interface
 - Accessories for types of assembly

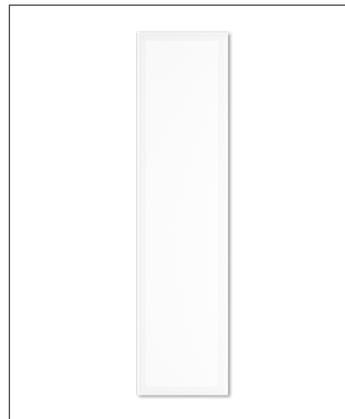


Product number	System performance typ. [W]	Light color	Luminous flux [lm]	Control
	■	◆		●
805595	45	3000K	4320	switchable
805638	45	4000K	4500	switchable
805640	45	6000K	4725	switchable
805637	45	3000K	4320	DALI
805639	45	4000K	4500	DALI
805641	45	6000K	4725	DALI


Equipment



Mounting frame

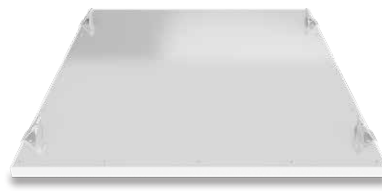

Installation clips

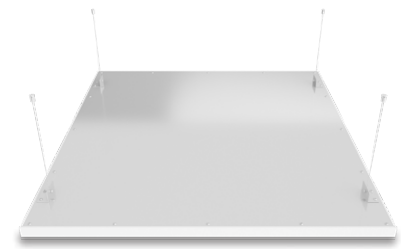

Pendulum set

Article Number | Explanation

Example: HL-■S-HT●-02◆▲C▷

- HL Series
- System performance typ. [W]
- ◆ Light color
- ▲ Beam characteristic
- Control
- ▷ CRI
- * Dimensions [mm]
- × Equipment

For example: HL

HL Series, D=dimmmable, 80/100 Watt, 5000K, A2=120°, 60=60°, TA=60°x90°, 8=CRI>80

TRS-STAR GmbH

Werner-von-Siemens-Str. 1
76297 Stutensee

Development, Planning
and Technical Sales
Dipl. Ing. Frank Werz
T +49 6233 347-125
werz@trs-star.com