
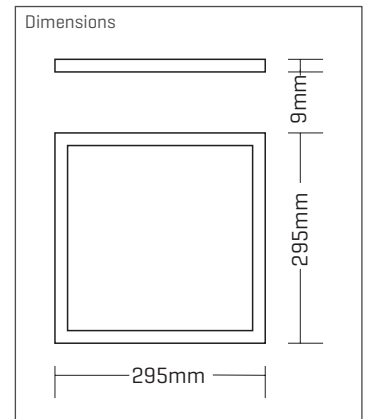


ENCORE | Ceiling Lights

ENCORE SL 30

- Ultra-flat square LED recessed ceiling light
- Recessed, surface-mounted, pendant version and wall lamp
- Opal uniformly wide diffuser disc
- Patented edge feed
- Flicker-free light
- Including external converter
- Modifications:
 - - dimming interface
 - - Accessories for types of assembly

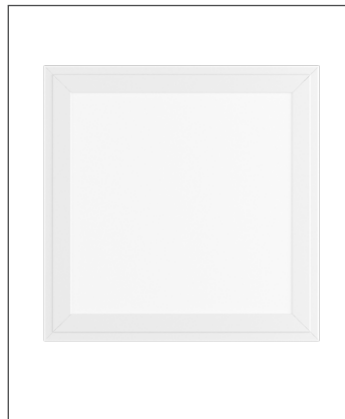

Product number	System performance typ. [W]	Light color	Luminous flux [lm]	Control
	■	◆		●
805593	24	3000K	2304	switchable
805628	24	4000K	2400	switchable
805630	24	6000K	2520	switchable
805627	24	3000K	2304	DALI
805629	24	4000K	2400	DALI
805631	24	6000K	2520	DALI


Equipment



Mounting frame



Installation clips

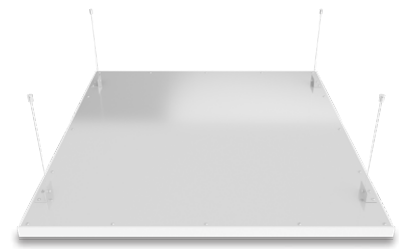

Pendulum set

Article Number | Explanation

Example: HL-■S-HT●-02◆▲C▷

- HL Series
- System performance typ. [W]
- ◆ Light color
- ▲ Beam characteristic
- Control
- ▷ CRI
- * Dimensions [mm]
- × Equipment

For example: HL

HL Series, D=dimmmable, 80/100 Watt, 5000K, A2=120°, 60=60°, TA=60°x90°, 8=CRI>80

TRS-STAR GmbH

Werner-von-Siemens-Str. 1
76297 Stutensee

Development, Planning
and Technical Sales
Dipl. Ing. Frank Werz
T +49 6233 347-125
werz@trs-star.com